

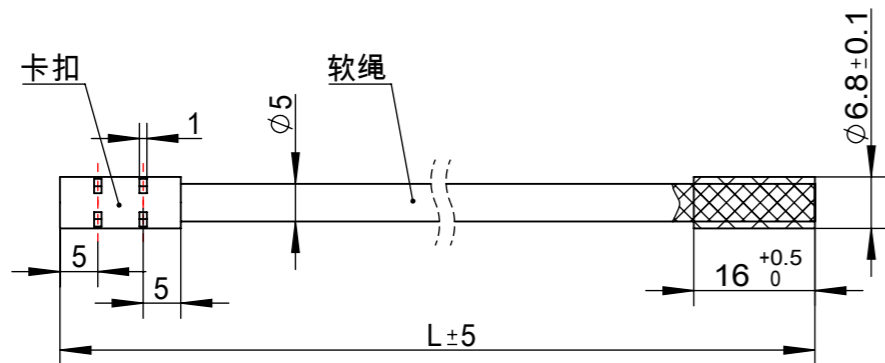
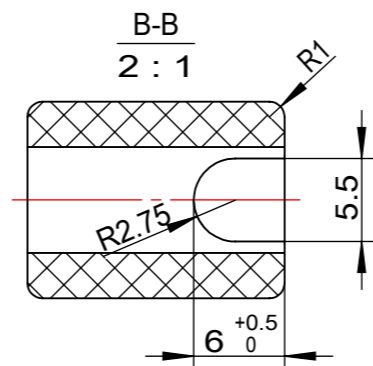


0100044049

受控


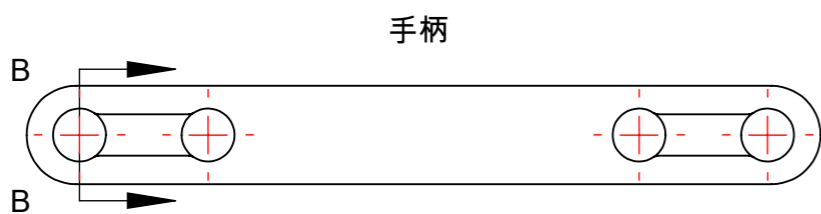


卡扣等轴测视图



提绳等轴测视图 (一)

提绳等轴测视图 (二)

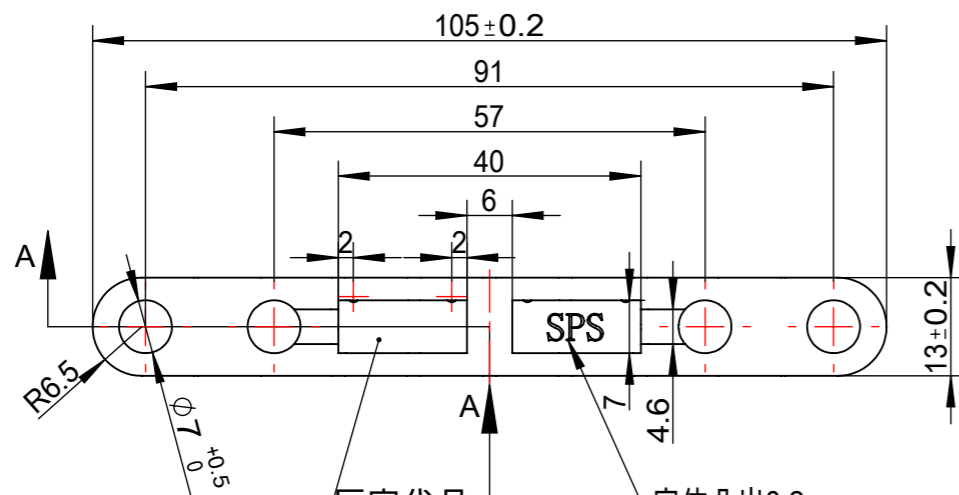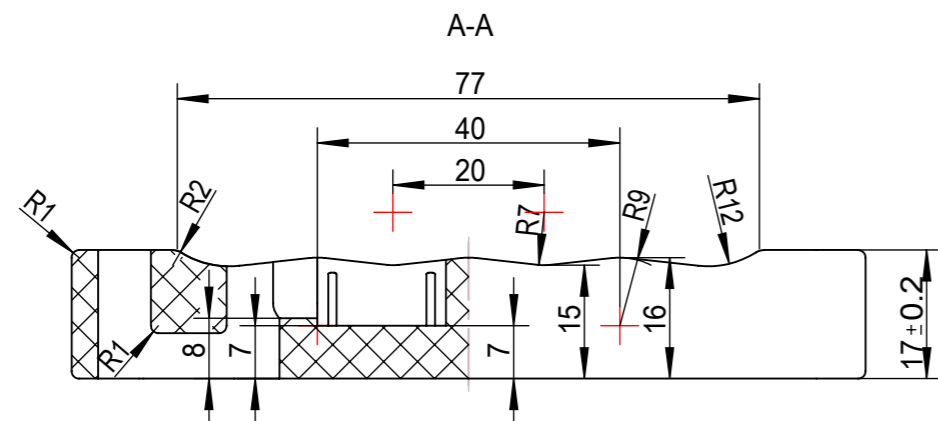

厂家代号: ××  
模具编号: ××  
字体凸出0.2mm  
仿宋, 字号: 3.5mm

限位钉尺寸根据配合自行设计

技术要求:

Technical requirements:

1. 软绳与卡扣之间采用压铸成型, 连接牢固, 卡扣材质为PE;  
Die-casting is used between the soft rope and the snap, and the connection is firm. The material of the snap is PE;
2. 手柄表面圆滑、无毛刺, 材料为ABS;  
The handle surface is smooth and burr-free. The material is ABS;
3. 软绳采用直径5mm的尼龙三股扭绳, 提绳承载力不小于100KG;  
The soft rope adopts nylon three-strand twisting rope with diameter of 5mm, and the carrying capacity of the lifting rope is not less than 100KG;
4. 未注公差按SJ/T10628-1995中6级执行, 未注圆角0.5.  
Unmarked tolerances are executed according to SJ/T 10628-1995 level 6, without fillet 0.5.

物料号	物料描述	尺寸L	备注
200021223	提手/1号灰L105/提绳白色	450	手柄(ABS非/1#灰)、软绳(尼龙/白)、卡扣(PE/白)
200021224	提手/黑色L105/提绳黑色	450	手柄(ABS非/黑)、软绳(尼龙/黑)、卡扣(PE/黑)
200028272	提手/1号灰L105/提绳白色/加长	570	手柄(ABS非/1#灰)、软绳(尼龙/白)、卡扣(PE/白)

标记	处数	更改文件号	签名	日期
Sign	Qty	File Number	Signature	Date
设计	孔程程	标准化	郭保	20210308
Designed	20210304	Standardized		
校对	南壮	审核	尹明	20210309
Collated	20210308	Checked		
工艺	曹光耀	批准	王余量	20210309
Technic	20210308	Approved		

L105 提绳 Handle Rope			阶段标记 MPS	重量 Weight	比例 Scale
			S		1:1
			页码 Page	1	总页数 Total
			1		
			山东圣阳电源股份有限公司 SHANDONG SACRED SUN POWER SOURCES CO.,LTD		