
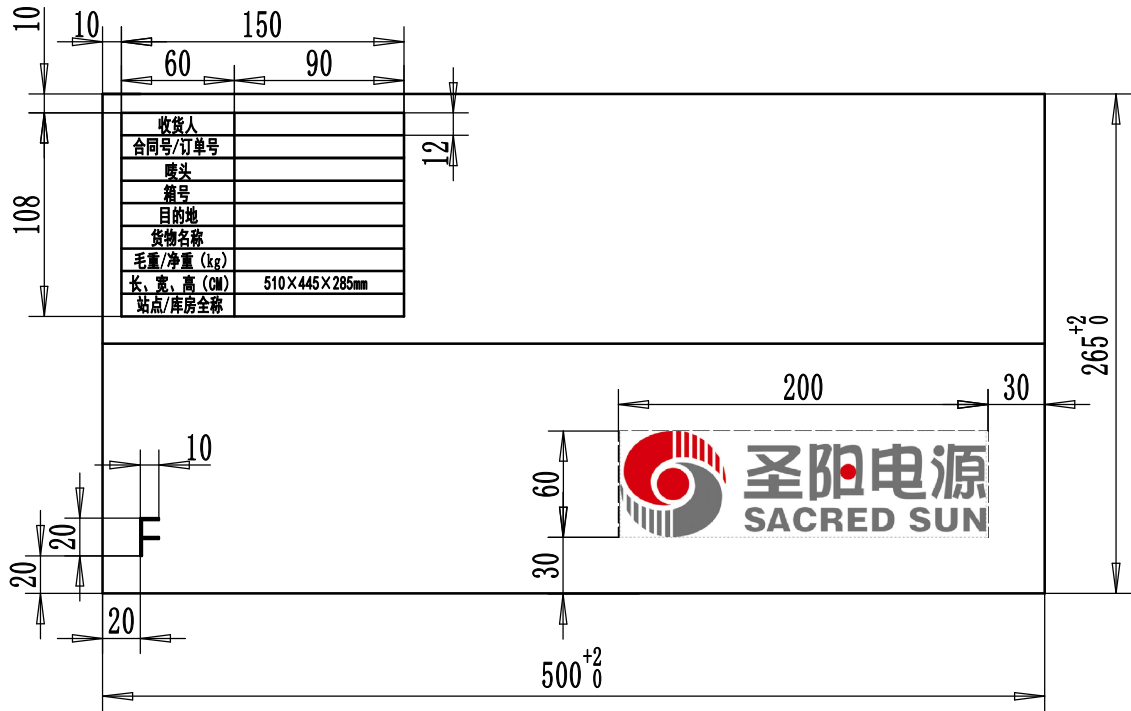


0100076447

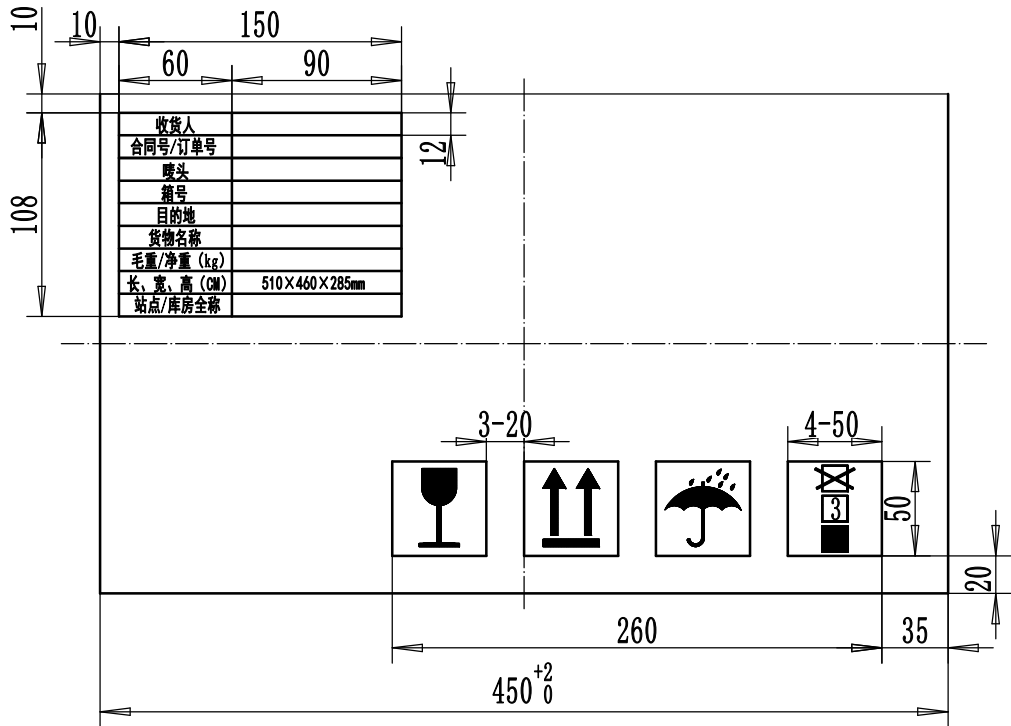

技术要求:Technical requirements:

1. 所标尺寸为纸箱的内壁尺寸;The dimensions superscript mark as the inner carton size;
2. 纸箱板厚6.5mm, 公差±0.5mm, 纸箱材料:内壁(里纸)及外壁(面纸)为九龙箱板环保纸, 定量≥170g/m²; 中间双层瓦楞纸, BC型瓦楞定量≥170g/m², 瓦楞形状UV状, 纸箱颜色: 正常土黄色; 纸箱装订时采用双排铜钉, 间隔60mm; The thickness of the carton board is 6.5mm, the tolerance is ±0.5mm, and the carton material: the inner wall (inner paper) and the outer wall (face paper) are environmentally friendly Jiulong board paper, with a basis weight ≥170g/m²; the middle double layer corrugated paper, BC type corrugated basis weight ≥170g/ m², the corrugated shape is UV-like, the color of the carton: normal khaki; when the carton is bound, double rows of copper nails are used, with an interval of 60mm;
3. 符合标准:GB/T 6543-2008;Standard:GB/T 6543-2008;
4. 印刷清晰, 无飞边, 跑墨现象。字体均为黑体字。所有字体、图案颜色均为黑色, 内容按图纸标注的尺寸及位置双面印刷, “F”标识只印刷一面;

Print clearly, no casting fin, missing ink. Typefaces are the boldface type.All typefaces, the design color are the black color, and the content must be print as the dimension & location in drawing and double-side, “F” logo printed on one side only;

旧底图总号

底图总号

日期

签字

					48V100Ah-5U 中文纸箱-深380-侧开 Carton	0100076447		
标记	处数	更改文件号	签 名	日期		阶 段 标 记		重 量
Sign	Qty	File Number	Signature	Date		MPS		Weight
设 计	标 准 化					S		比 例
Designed	Standardized					页 码		总 页 数
校 对			审 核			1		1
Collated			Checked			山 东 圣 阳 电 源 股 份 有 限 公 司		
工 艺			批 准			SHANDONG SACRED SUN POWER SOURCES CO.,LTD		
Technic			Approved					